

*The Monimax 5100 is a powerful, secure lobby model that can easily handle high-volume transactions. Plus, it features a sleek, contemporary design that will give your institution a leading-edge image.*

## Features

### Powerful Performance

With a Windows XP platform, Pentium processor and 8,000 note capacity, this ATM can handle high volume with maximum uptime. Open-architecture software is also available on a 15" color TFT LCD.

### Improved Security and Access

You need ATMs that offer the highest level of security. The Monimax 5100 delivers the peace of mind you want with a UL291 Level 1 safe and a PCI-certified encrypting PIN pad. It's also ADA-compliant and gives customers an easy-to-use interface.

### Small Footprint, Large Display

A 15" touch screen is both attractive and exceptionally secure. And with a small footprint, this lobby model can fit into tight spaces.

### Visible Marketing Power

Vacuum Fluorescent Display (VFD) has exceptional clarity when seen from a distance. It attracts customers' attention—and is a great opportunity for promotional messages.



***Superior quality, security and value.***

***Only with Nautilus Hyosung.***

*Now offering the most complete line of financial and retail ATMs.*

### Dependable Customer Service

You can't afford ATM downtime. That's why we offer customer service with real people and real solutions. Trust Nautilus Hyosung to be your business partner.

# MONIMAX 5100

## System Control

- Intel® Pentium IV® processor
- Microsoft® Windows XP® platform
- NDC+, DDC912, User Application

## Customer Display

- 15" color TFT LCD
- Optional**
- Privacy filter

## Communication

- TCP/IP (SSL configurable)
- Optional**
- Dial-up, Wireless, X.25

## Input Type

- 4 x 2 function keys
- PCI EPP (Encrypting PIN pad)
- ADA compliant
- Optional**
- Touch screen

## Card Handling

- Dip-type card reader
- Optional**
- IC card reader, EMV Level 1, 2 compliant
- Anti-skimming

## Cash Dispensing

- 2,000-note cassette
- Up to four cassettes

## Printers

- 3.1" graphical thermal receipt printer
- 3,500 transactions
- Electronic journal

## Security

- UL291 Level 1 safe
- Mechanical combination lock
- Optional**
- Electronic safe lock
- KABA Mas Cencon safe lock
- Security camera

## Miscellaneous

- Lead-through indicator
- Optional**
- Heater
- Vacuum Fluorescent Display (VFD)

## Power Supply

- AC 110–240V, 50–60 Hz
- Back-up battery

## Operating Environment

- Temperature: 28°F–104°F
- Humidity: 25%–85%

## Dimension and Weight

- Height: 61.1" (1,552 mm)
- Width: 18.1" (460 mm)
- Depth: 30.7" (780 mm)
- Weight: 926 lbs (420 kg)

Internal components may change with the introduction of new technology. Nautilus Hyosung reserves the right to change the specifications of this ATM to accommodate the changes in technology.


**Secure**  
Communications  
**Dial-up or**  
**Built-in TCP/IP**  
**and SSL**

Vacuum Fluorescent  
Display (VFD)

Audio guidance  
earphone jack

Card reader

Capacity for four  
2,000-note cassettes

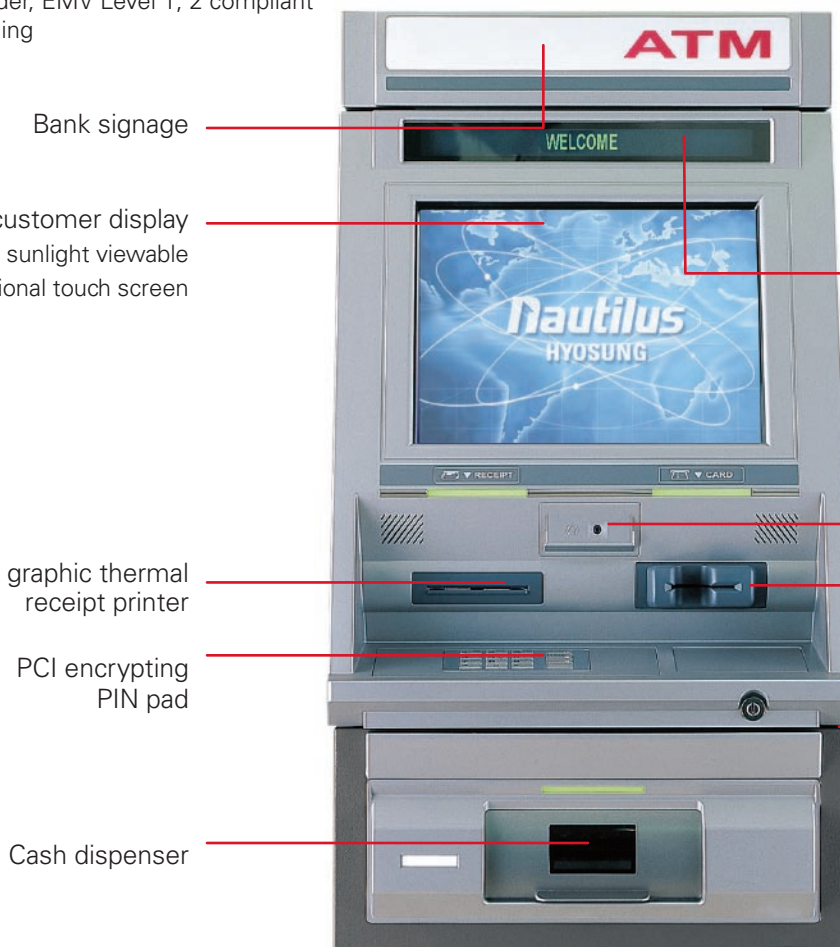

**Nautilus**  
HYOSUNG

Contact your authorized Nautilus Hyosung distributor or representative for more information.